

VARIATION OF LONG-PERIOD GROUND MOTION CAUSED BY SMGA DISTRIBUTION OF THE SAGAMI TROUGH EARTHQUAKE

Y. Terashima⁽¹⁾, N. Fukuwa⁽²⁾

⁽¹⁾ Technology Department Head Office, Takenaka Corporation, terashima.yoshihiro@takenaka.co.jp

⁽²⁾ Professor, Disaster Mitigation Research Center, Nagoya University, fukuwa@nagoya-u.jp

Abstract

There are many high-rise buildings in the Kanto region of Japan, represented by Tokyo, and a large earthquake in this area can cause a serious damage. In Particular inter-plate earthquakes along the Sagami Trough are destructive earthquakes that have repeatedly occurred in the past (in 1703 and 1923), and there is a concern that it will occur in the near future.

Several studies with observations of long-period ground motions at sites on the sedimentary plain have reported that the periodic characteristics, amplitudes, and durations of the waves vary with the location of the hypocenter. For an inter-plate earthquake such as the huge earthquake along the Sagami Trough, the source area is assumed to be vast, and therefore, the effect on the strength of the ground motion may differ even within the same source area. Thus, predicting the location of source area that can greatly contribute to the strength of the ground motion will help employ strong motion generation area (SMGA) for ground motion prediction.

In this study, we focused on long-period ground motion of the city where high-rise buildings are concentrated, such as Shinjuku (Tokyo Pref.), Marunouchi (Tokyo Pref.) and Chiba (Chiba Pref.), and we investigated source areas where ground motion became strong within the source area of the huge earthquake along the Sagami Trough. Using the reciprocity theorem in the numerical simulations conducted using the three-dimensional difference method, we calculated Green's Function for the Shinjuku site from each subfault in the assumed source area, and we analyzed the spatial distribution of the velocity response value and input energy.

The results of this study indicated that the area close to the site (area 1) and the area where the subfault depth was shallow areas 2 to 5. On comparing the sites, we found that the area where the amplitude is dominant varies depended on the site. Shinjuku and Marunouchi sites, which are relatively close (less than 10 km), have almost the same spatial distribution, but there is a difference in the relationship between area 2 and 4. At Chiba which is far from these two sites, the amplitude is dominant in the area 5 where no dominance was observed at other sites. Further, on comparing the position of SMGA widely used in the practice of structural design for long-period architectures, a large corresponding areas 1 to 5 was observed; however, no SMGA could cover areas 1 to 5 in one cases.

Keywords: Long-period ground motion, Megathrust earthquake along the Sagami Trough, the Kanto basin, Green's function, Reciprocity method

1. Introduction

There are many high-rise buildings in the Kanto region of Japan, represented by Tokyo, and once a large earthquake occurs, it will have an enormous impact on the society. The occurrence of a plate boundary earthquake along the Sagami Trough in the Kanto region is serious concern. This earthquake has repeatedly occurred in the past, at the inter-plate between the Philippine Sea plate and the continental plate beneath the Kanto region. In recent years, the Genroku Kanto Earthquake (1703) and the Taisho Kanto Earthquake (1923) have been cited as destructive earthquakes [1].

Recent government ground motion predictions for inter-plate earthquake along the Sagami Trough include those of the Tokyo Metropolitan Government (TMG) [2], Central Disaster Management Council (CDMC) [3], and Headquarters for Earthquake Research Promotion (HERP) [4]. The former two predictions set fault parameters estimated from past earthquakes; however, the latest prediction considers various fault parameters such as strong motion generation area (SMGA) location and areas [2-4]. However, as the hypocenter area is very large, it is difficult to arrange the SMGA to cover it because of its high computational cost. Fig. 1 shows the hypocenter area and SMGA layout used in the previous earthquake prediction; it is evident that the SMGA cannot cover all area.

In relation to the arrangement of the SMGA, several studies with observations of long-period ground motions at sites on the sedimentary plain have reported that their periodic characteristics, amplitude, and duration of wave vary with the location of the hypocenter [5-8]. Zama [5] pointed out that the amplitude and predominant period of ground motions in Tokyo depends on the location of the epicenter, and Ishii [7] pointed out that the duration depends on the location of the epicenter. Furumura and Hayakawa [6] examined the propagations of multiple surface waves in the Kanto Plain as a cause for the 2004 Niigata Chuetsu Earthquake, and they suggested that the surface waves merge and the ground motion becomes large. Further, Hirai and Fukuwa [8] performed numerical analysis on an irregular basin structure model and confirmed that Green's Function (the characteristics of propagation path) between the source and site varied with the location of the hypocenter.

These studies were conducted on individual earthquake records with different hypocenter locations. When assuming a large source area such as an inter-plate earthquake, the Green's Function between the source and site can vary even within the same source area. Petukhin et al. [9] examined the spatial distribution of the Green's Function in the assumed source area for the Nankai Trough Earthquake, and they pointed out that the amplitude of the Green's Function becomes large even for distant source areas. Petukhin et al. [9] examined the spatial distribution in the source area using the maximum velocity of the Green's Function as an index. Based on the above studies [5-8], the maximum velocity and duration of a specific period were found to be different from the maximum velocity distribution of the entire period.

This study investigated the region where the ground motion becomes strong within the source area of the huge earthquake along the Sagami Trough. We focused on the long-period ground motion of the city where high-rise buildings are concentrated, such as Shinjuku (Tokyo Pref.), Marunouchi (Tokyo Pref.) and Chiba (Chiba Pref.). We use the maximum velocity response and input energy of the SDOF models for long-period buildings as an index of the strength of ground motions. The final goal of this study is to show the positional relationship between the area and the SMGA used in the previous damage estimation. In addition, the response values of various periods and damping value are calculated, and they are found to be focused on vibration characteristics of the building.

2. Methods

Numerical analysis was performed using the finite difference method (FDM) [10] for a three-dimensional ground model. Although this study focuses on one site, it is necessary to calculate the Green's Function for more than 10,000 subfaults. Since calculation using normal FDM needs to be performed for the total number of subfaults, we reduced the computational cost using the reciprocity theorem [8]. In particular, the apparent hypocenter was set at the site; each wave field of the two horizontal (north / east) and vertical impulsive single

forces and distortion at the real epicenter were calculated. Based on the distortion tensor, we can obtain the Green's Function to represent the displacement at the target site using the impulsive moment tensor at each subfault. Therefore, when the reciprocity theorem is used, the Green's Function can be calculated by a total of three calculations using FDM for two horizontal and vertical single forces.

In this study, a Japan integrated velocity structure model (JIVSM) [11], which is used for long-period ground motion hazard map were used. The author's previous study [12] also used this model, and they confirmed that the distance attenuation characteristics of the long-period ground motions from the epicenter to central Tokyo correspond to observation records and numerical analysis results for some earthquakes. Fig. 2 shows the bedrock depth of this model. The Kanto Plain has a seismic bedrock depth of about 3 km over a wide area, and it has a basin structure. The outline of the basin edge is indicated by the dashed line.

Fig. 3 shows the subfault in the source area. First, the subfault location was found from the upper surface of the Philippine Sea plate of JIVSM. In particular, because an inter-plate earthquake is assumed, the area where the upper crust exists and the upper surface of the Philippine Sea plate is less than 55 km or less depth is used. The target area was divided by a 2 km mesh, and the subfault was set. The depth limit corresponds to the deepest value of the inter-plate earthquake that occurs along the Sagami Trough, which is the basis for setting the previous ground motion prediction [3]. The strike and dip were calculated from the shape of the Philippine Sea plate, and the rake angles were assumed to be 0° and 90° . The source time function was set to be triangular (the rise time is 2 s), and the seismic moment was set to 10^{18} Nm. However, because the variation of ground motion based on the source location is discussed in this paper, the seismic moment and the source time function were set only for the convenience of the analysis. Fig. 3 shows the hypocenter distance of each subfault from Shinjuku; the area with the shortest hypocenter distance is slightly south of the Shinjuku point.

The conditions of FDM will be described. For the discretization of space and time, the space step was set to 200 m and the time step was set to 0.01 s. The minimum period that can be referenced by this simulation is 2 s. The edge of the ground model showed a non-reflection boundary [13] and an absorption boundary of 20 grids [14]. The reference period of the inelastic damping was 2 s.

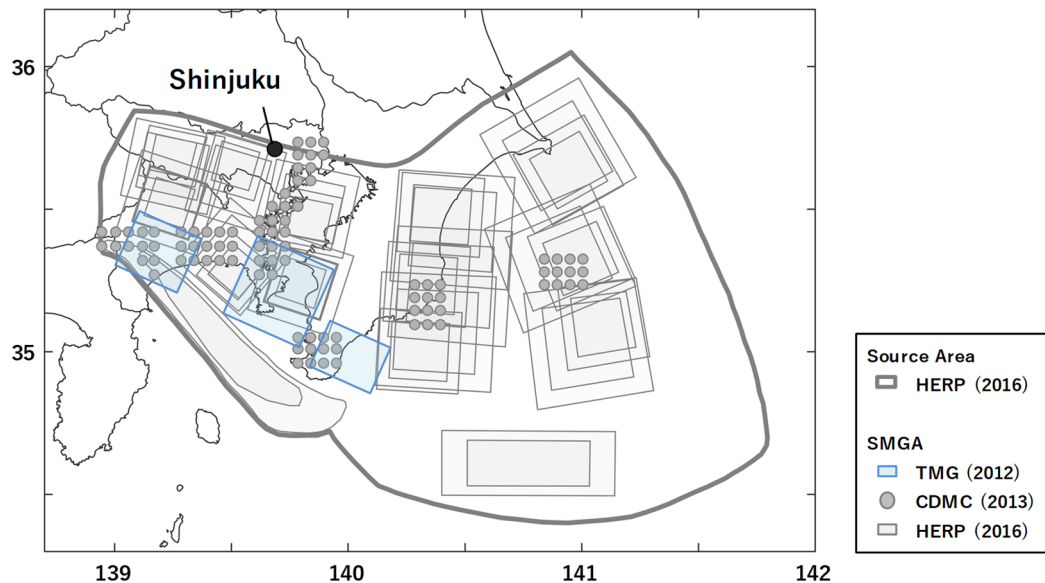


Fig. 1 – Past source models for the Kanto earthquake. HERP (2016) considers uncertainty of the position of the SMGA, and overwrites all cases here.

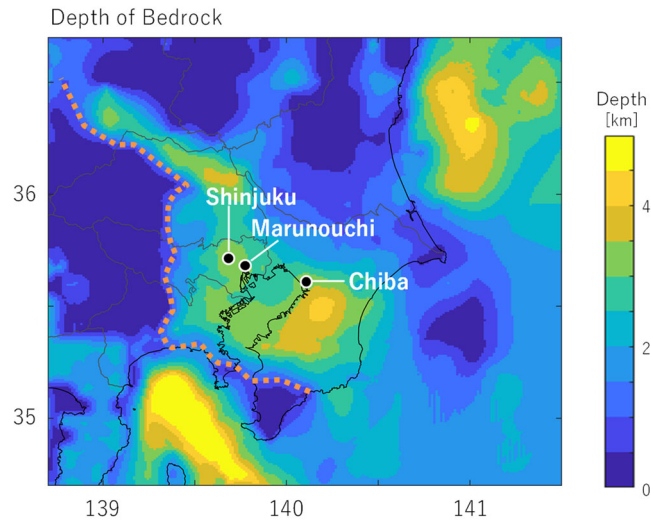


Fig. 2 –Seismic bedrock depth distribution of Japan integrated velocity structure model (JIVSM) used for the finite difference method (FDM). The dashed line indicates the outline of the basin edge of the Kanto Plain.

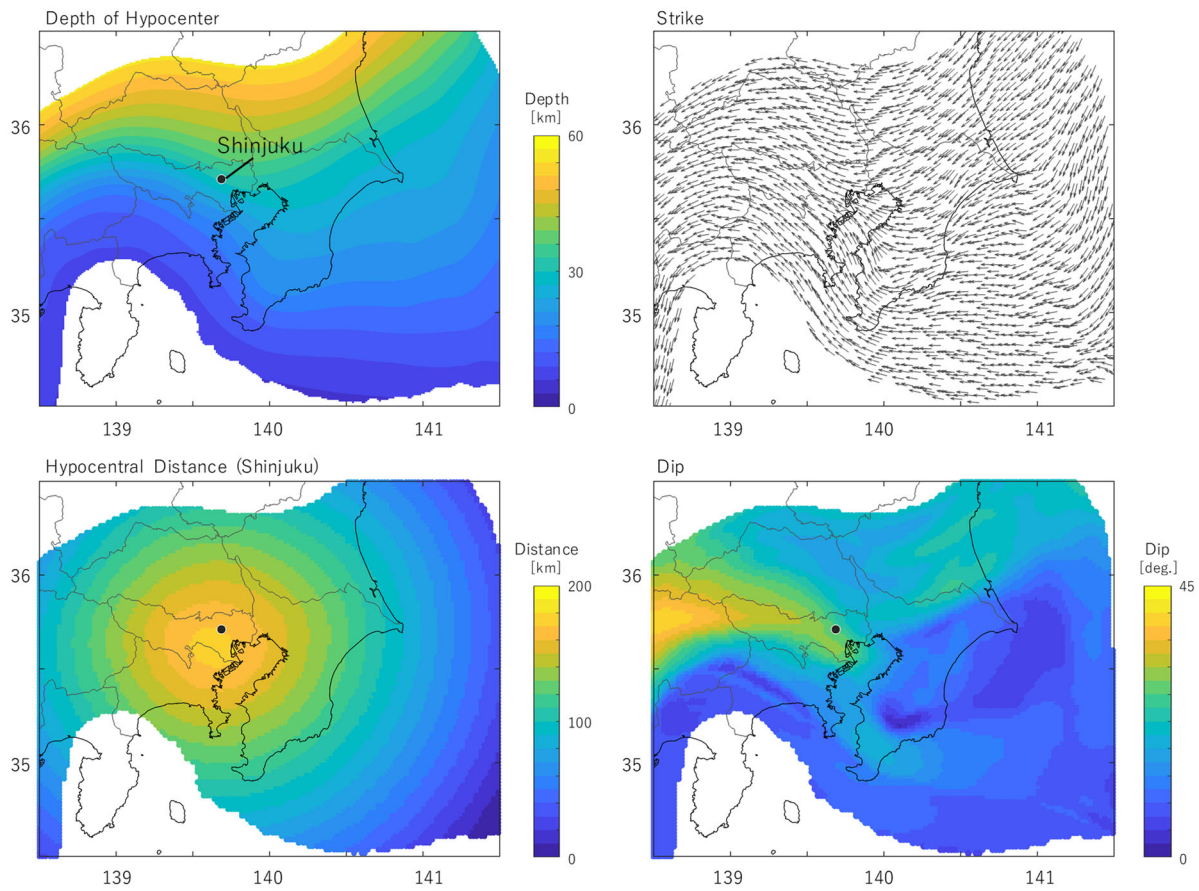


Fig. 3 –Conditions of subfault set based on the shape of the Philippine Sea plate. The hypocenter depth (upper left), strike (upper right), and dip (lower right) are shown. The hypocenter distance in case Shinjuku site (lower left) is also shown.

3. Results

In this section, we will show the fundamental results about spatial distribution of the Green's function at Shinjuku point first. And after, we will compare on spatial distributions using the result at Shinjuku, Marunouchi and Chiba. Fig. 4 shows the spatial distribution of the response values of the SDOF calculated from the Green's Function assuming a rake angle of 0° at Shinjuku. These response values are velocity response spectrum S_V indicating instantaneous maximum amplitude and an energy spectrum V_E indicating amplitude and duration. Fig. 5 also shows the results assuming a rake angle of 90° . We calculated the geometric mean value for periods of 3 - 5 s for general high-rise buildings and seismic isolation buildings; for periods of 5 - 7 s assumed for buildings with especially long periods, the damping was assumed to be 5%.

In Fig. 4 and Fig. 5, areas 1 to 4 show response values that are dominant, and the distance attenuation of the response values do not always correspond to an increase in the hypocenter distance. Naturally, the response values tend to be large in area 1 near the site, but the response values may be large in areas 2 to 4, which are distant from the site. Focusing on the relationship between hypocenter depth and response values, the values are large at south and west of Shinjuku (area 2 to 4), where the source is shallow. The tendency is remarkable in V_E including the information of duration. This tendency is because surface waves, which are the main components of long-period ground motions, are easily excited. This corresponds to our previous study [15] in which the variation of long-period ground motion tends to appear at a shallow source compared to a deep source. In areas 2 to 4 to the south and west, the spatial distribution of the response values corresponds to the shape of south and west basin edge of the Kanto Plain. In the Kanto Plain, it is known that surface waves are excited when seismic waves enter the plain from the western basin edge and propagate so as to concentrate toward central Tokyo [16, 17]. On the other hand, in the northwest to southeast, the response is smaller than that in other directions, and the long-period components affecting long-period structures are small.

Next, the differences in the response value types, wave orientations at site, and rake angle of subfault are examined for Figs. 4 and 5. We compare the spatial distribution of S_V and V_E . The comparison of these values in the same periods and same orientation indicates that there are cases with a difference in their spatial distributions. In the period of 3 - 5 s and the radial component shown in Fig. 4, the difference in amplitude between areas 1, 2, and 4 is small as S_V , but area 4 is large as V_E . Further, the same tendency is seen in the transverse components for the period 5 - 7 s in Fig. 4, and area 1 has the largest as S_V , while area 3 is the largest as V_E .

On comparing wave orientations at the site in the same periods, there are dominant areas which have different and common orientations. At the source immediately below the site, the radiation characteristics of the source are deeply shown, and the direction in which large amplitude in the radial and the transverse component is orthogonal, is common near the site. On the other hand, at a source far from the site, in the radial component, the amplitude tends to be large in the region from southwest to south (area 3, 4); however, in the transverse component, the amplitude tends to be large in the west region (area 2). The amplitude in UD component is small but similar to the tendency of radial component, and thus, the amplitude tends to be large in areas 3 and 4.

On comparing the rake angles of the subfault, we find that if the rake angle changes, the basic tendency that the amplitude in the south and west is large is common; however, it is different in same period. In particular, area 4 tends to be large for a rake angle of 0° in the radial component, but area 3 tends to be large for a rake angle of 90° . A similar tendency is seen in the UD component, indicating that the characteristics are because of the Rayleigh wave, and the excitation of the Rayleigh wave differs depending on the rake angle of the source.

Fig. 6 shows a comparison of spatial distribution focusing on the building period and damping case; period of 3 - 5 s; damping constant 5% assuming damping building, period of 3 - 5 s; damping constant 20% assuming seismic isolation building, period of 5 - 7 s; damping constant 2% assuming super high-rise building. Note that RotD100 [18] was used because we do not assume the building orientation. Fig. 6 shows the result about rake angle of 0° . The comparison of the damping constants for the period of 3 - 5 s (damping building and seismic isolation building) indicates that there is a difference in the absolute value; however, the regions

where the amplitude is large are similar. On the other hand, a comparison of period bands (damping building and super high-rise building) indicates that the characteristics of spatial distribution are slightly different from each other. In particular, in the period of 3 - 5 s at rake angle of 0°, area 4 has large amplitude in the wide area; however, in the period of 5 - 7 s, it is not larger than other areas. Further, for area 2, the maximum region in the area is slightly different. Thus, it was found that the difference due to the period was larger than that caused by the damping constant.

Fig. 7 shows a comparison of spatial distribution focusing on the site case; Shinjuku, Marunouchi, and Chiba. We used RotD100 and the result about rake angle of 0°. In Fig. 7, areas 1 to 5 are indicated by broken lines circle as areas where the amplitude is dominant. Area 1 is an area where the distance is close to each site and the amplitude is dominant, and area 1 shows unique location for each site. On the other hand, areas 2 to 5 show common location for each site. On comparing the sites, we found that the area where the amplitude is dominant varies depended on the site. Shinjuku and Marunouchi sites, which are relatively close (less than 10 km), have almost the same spatial distribution, but there is a difference in the relationship between area 2 and 4. Further, at Chiba, which is far from these two sites, the amplitude is dominant in the area 5 where no dominance was observed at other sites.


Fig. 8 shows areas 1 to 5 where the amplitude is likely to be large and SMGA distributions of previous ground motion predictions by the Government, Japan. Table 1 shows the correspondence between areas 1 to 5 and the SMGA arrangement. Table 1 shows level of overlap areas 1 to 5 and the SMGA arrangement as three levels (Small, Medium, and Large). For HERP (2016), the case that the SMGA is arranged shallower (Case P1), the case that the SMGA is arranged deeper (Case P2), and the case that two SMGAs are arranged immediately below Tokyo and Kanagawa (Case P3) were overwritten in Fig. 8. It seems that the assumed source of the past could cover area 1 to 4; however, it can be seen that none of the cases were located in area 1 to 4. Further, it was found that the assumed source of the past could not cover area 5. As cases in which multiple areas can be considered in one case, Case P3 of HERP (2016) is assigned to areas 1 and 3, and Case P1 is assigned to areas 2 and 4. It seems that Case P3 could cover areas 1 to 5 the most.

4. Discussion


This paper focused on long-period ground motion of the city where high-rise buildings are concentrated, such as Shinjuku (Tokyo Pref.), Marunouchi (Tokyo Pref.) and Chiba (Chiba Pref.). The purpose of this study is investigating areas where ground motions are strong within the assumed source area of the Sagami Trough Earthquake. The final goal was to show the positional relationship between those areas and SMGAs used in previous predictions. It was found that in addition to the area with the short distance (area 1), the response value was large in the area where the hypocenter depth from the south to the west was shallow (areas 2 to 5). Further, on comparing with the position of SMGA used in the previous study, there was a partly corresponding area; however, no SMGA was arranged on areas 1 to 5 in one case. Source models including the SMGAs compared in this study, are widely used in the practice of structural design for long-period architectures. It is possible to realize a safer design for buildings with high importance for disaster prevention by modifying the position of SMGA using the results of this study.

The relationship between the response values of areas 1 to 5, the type of response values (S_v , V_E), the period and damping constants of the SDOF model for general buildings, and sites, was investigated. Therefore, it is important to prepare in advance a spatial distribution of the response value in the assumed source area for a general type of buildings, such as a high-rise building or seismic isolated building.

Further, in this paper, only the spatial distribution of the response values of the Green's Function is calculated, and it is actually necessary to consider the SMGA size and the rupture propagation process, which is a future subject. However, even if the above points are considered, the result of the seismic simulation naturally becomes large for an area with a large Green's Function. In addition, the area where the amplitude tends to be large may change depending on the accuracy of the ground structure model used for simulation, and it is an issue to confirm the correspondence with the actual observation record. Base on

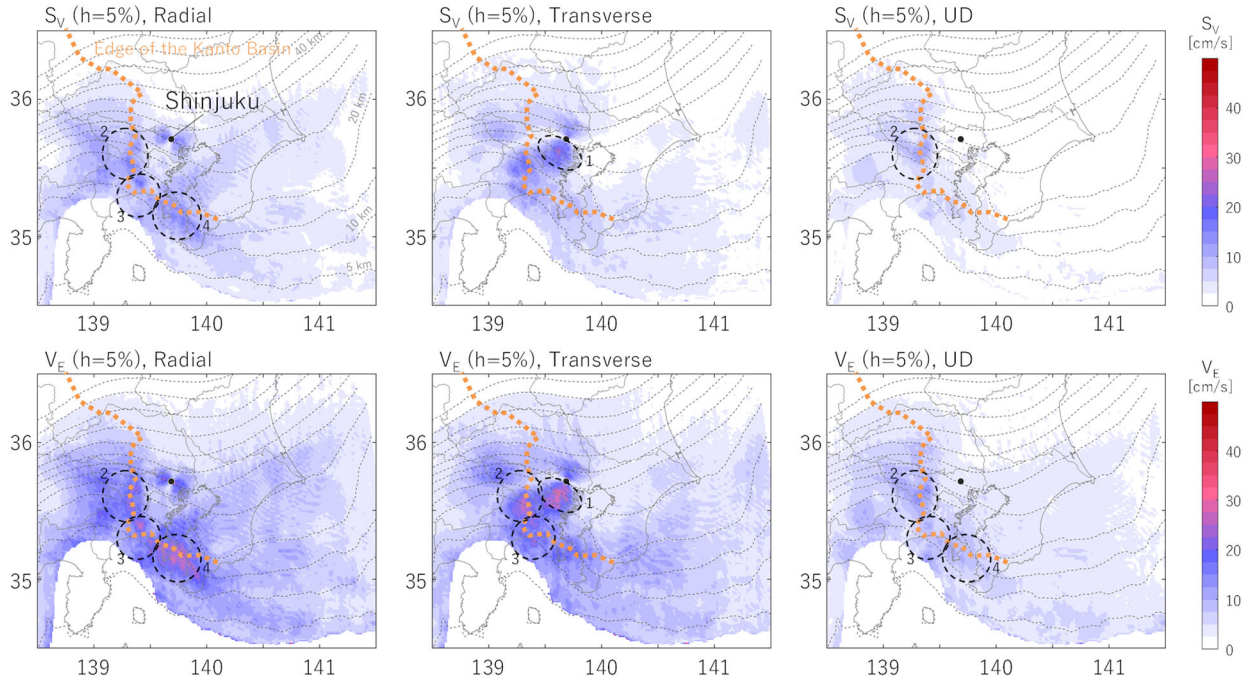


Geometric mean value with a period of 3 - 5 s

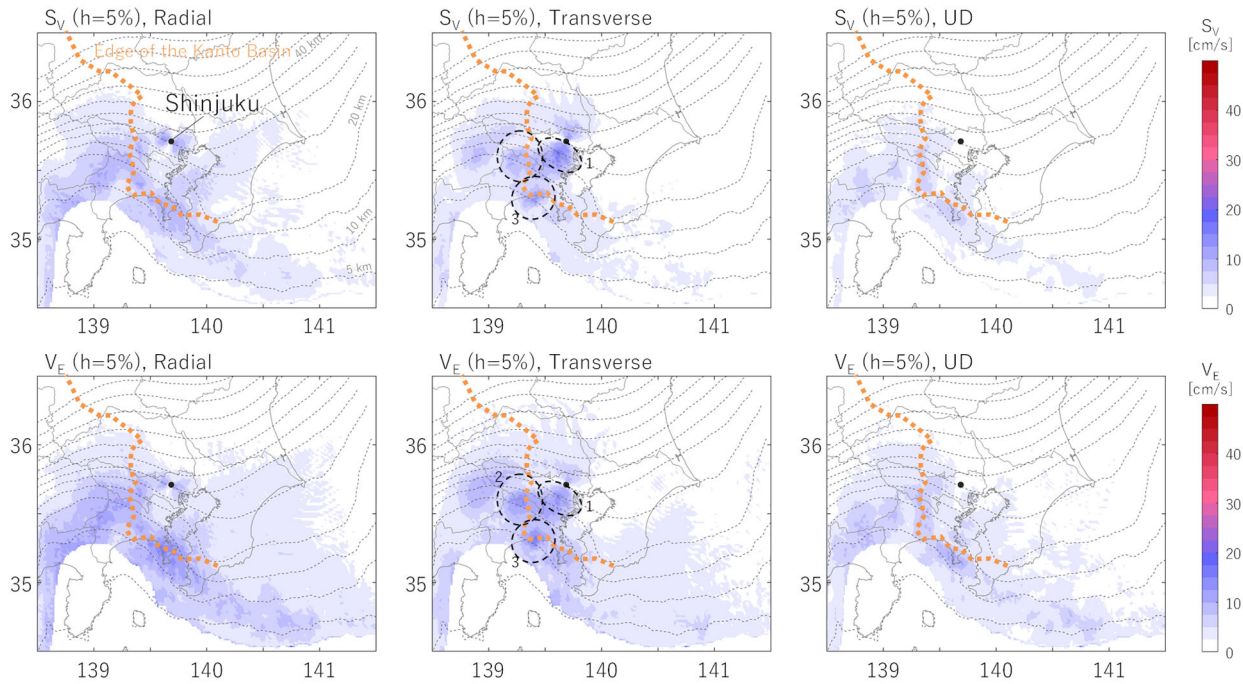


Geometric mean value with a period of 5 - 7 s

Fig. 4 – Results for rake angle of 0° ; the damping constant was set at 5%.

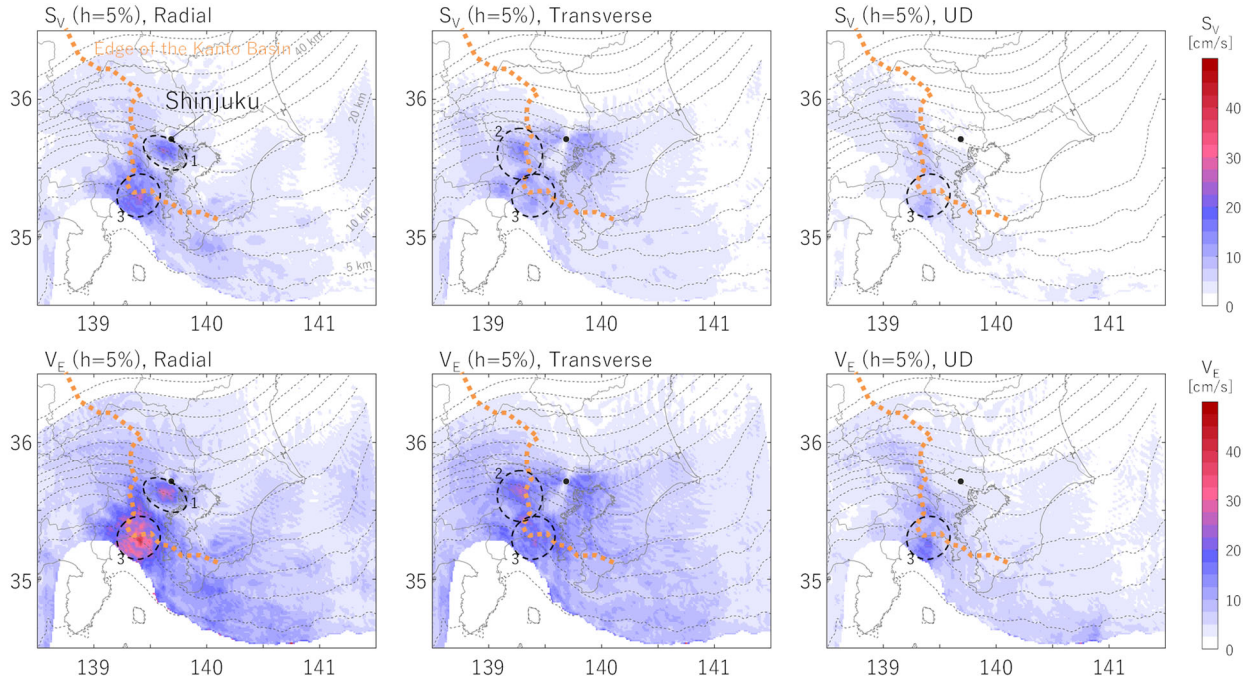

Geometric mean value with a period of 3 - 5 s

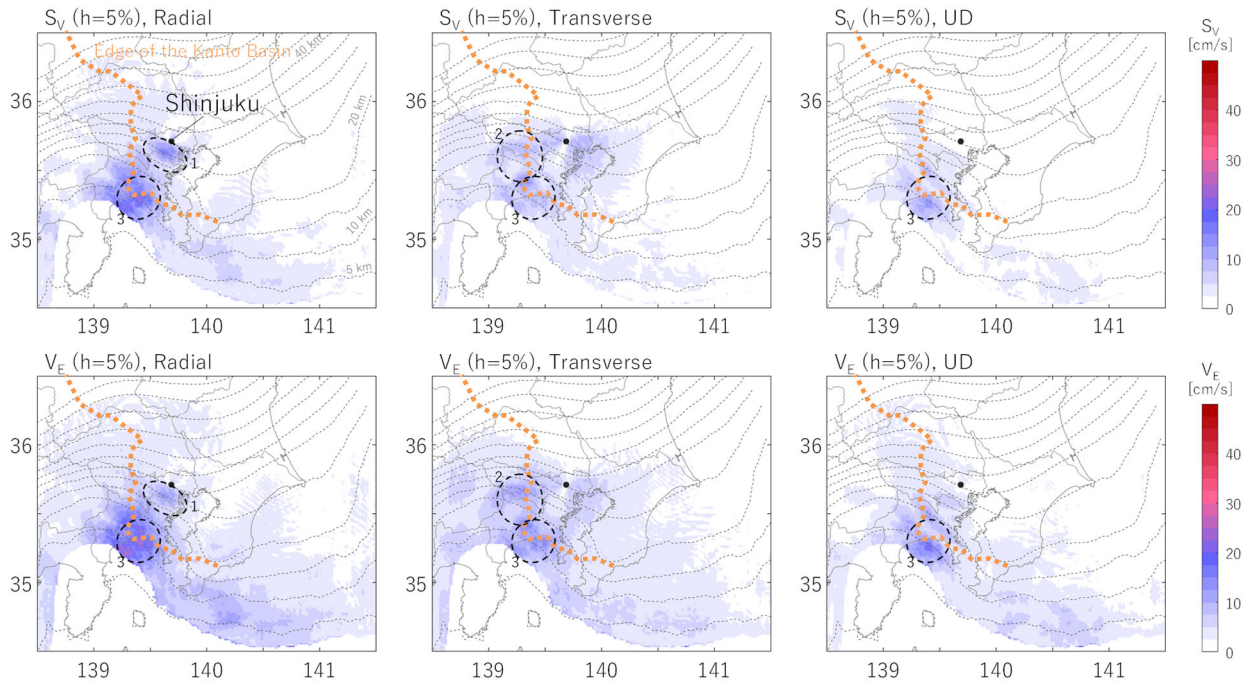

Geometric mean value with a period of 5 - 7 s

Fig. 5 – Results for a rake angle of 0°; the damping constant was set at 5%.

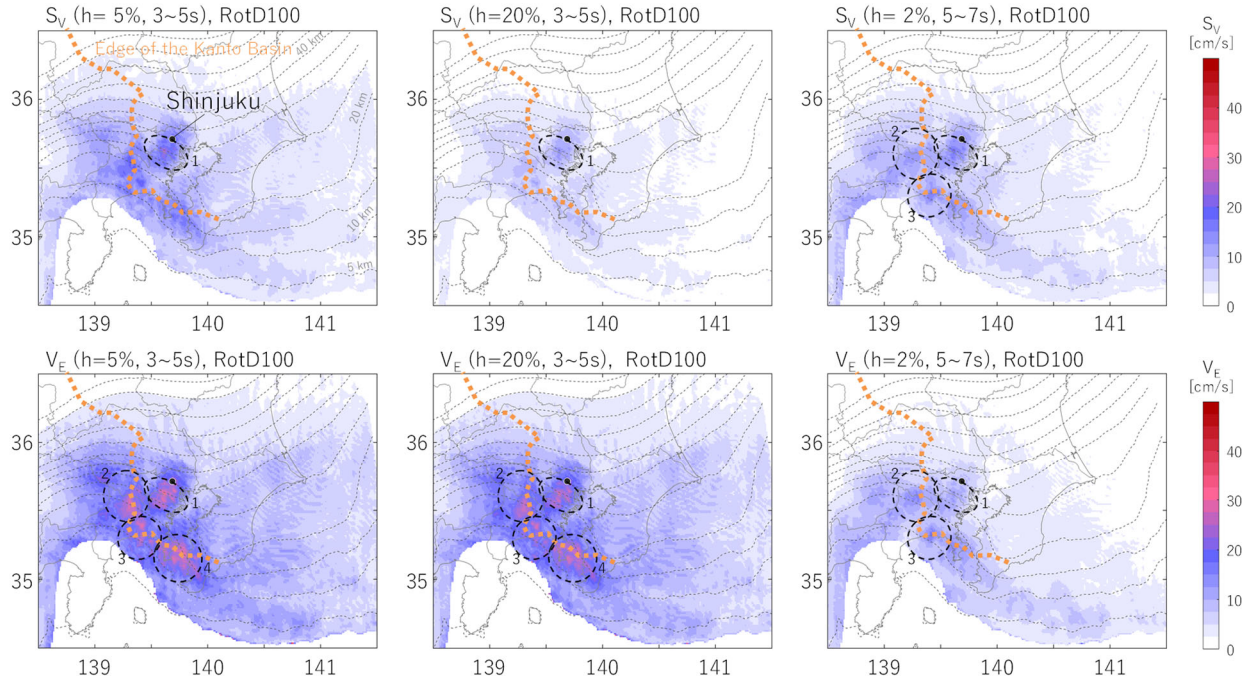


Fig. 6 – Difference as per building type. From left: Damping building (3 - 5 s, $h = 5\%$), seismic isolated building (3 - 5 s, $h = 20\%$), and super high-rise building (5 - 7 s, $h = 2\%$). The value to plot is RotD100. Results of rake angle 0° are shown.

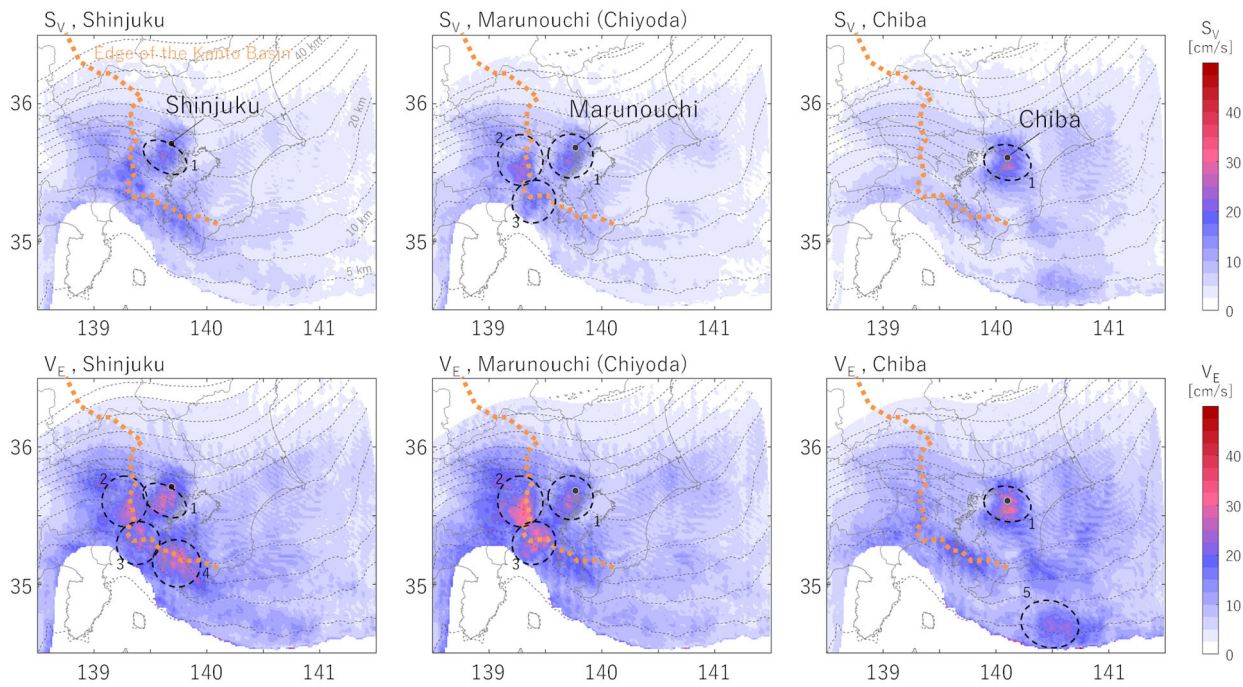


Fig. 7 – Difference as per city. From left: Shinjuku City, Marunouchi, Chiba City. The value to plot is RotD100. Results of rake angle 0° s.

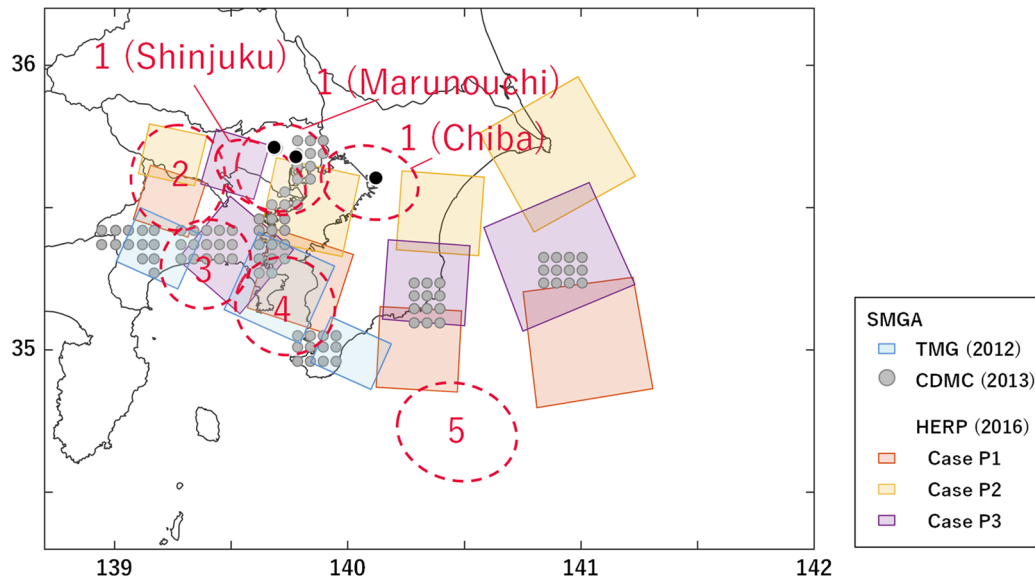


Fig. 8 –Comparison of the SMGA arrangement used in the previous ground motion predictions and area 1 to 5, whose amplitude are dominant in this study. For HERP (2016), three characteristic cases are plotted.

Table 1 –Correspondence between areas 1 to 5 and SMGA arrangement used in the previous ground motion predictions.

Area	Level of overlap				
	TMG	CDMC	HERP P1	HERP P2	HERP P3
Area 1 of Shinjuku	-	Small	-	Medium	Medium
Area 1 of Marunouchi	-	Medium	-	Medium	Small
Area 1 of Chiba	-	Small	-	-	-
Area 2	Small	-	Medium	Medium	Small
Area 3	Small	Medium	-	-	Large
Area 4	Large	Small	Large	-	Small
Area 5	-	-	Small	-	-

observation records, there are almost no earthquakes with a large magnitude in the areas 1 to 5. However, referring to the results of this paper, it is possible to predict ground motions larger than those predicted by conventional thinking, and thus it has engineering significance.

This study compared of spatial distribution focusing on the site case; Shinjuku, Marunouchi, and Chiba. We found that the area where the amplitude is dominant varies depended on the site. In large cities with many long-period structures (in addition to Shinjuku, Marunouchi, and Chiba, which was the subject of this study, Yokohama, Osaka, Nagoya, etc.), checking in advance where the SMGA has a large effect for buildings, will make the ground motion prediction efficient and safer. In this paper, a subduction-zone earthquake is considered as an example; however, the propagation path characteristics of a long active fault may vary within the same fault plane.

5. Conclusions

The spatial distribution of the response value of long-period ground motion in the assumed source area of an inter-plate earthquake along the Sagami Trough was investigated at the city where high-rise buildings are concentrated, such as Shinjuku (Tokyo Pref.), Marunouchi (Tokyo Pref.) and Chiba (Chiba Pref.). As a result, we found the area close to the site (area 1) and the area where the subfault depth was shallow areas 2 to 5. For areas 2 to 4, the spatial distribution of response value corresponded to the shape of the western and southern basin edge of the Kanto Plain. According to previous studies, the reason that these characteristics are related to surface waves, which are the main component of long-period ground motions, was guessed. On the other hand, from the northwest to the southeast, the response value was small even at the hypocenter distance equal to areas 2 to 4.

The difference in the spatial distribution between the response value type, wave orientation, and rake angle were studied. Thus, it was found that any one of area 1 to 4 showed a large response value, and that the relation of these values was different.

The relationship between the spatial distribution of response value and the building period and damping constant for the SDOF model, were discussed. We compared response value (S_V , V_E) of three types of buildings, period of 3 - 5 s; damping constant 5% assuming damping building, period of 3 - 5 s; damping constant 20% assuming seismic isolation building, and period of 5 - 7 s; damping constant 2% assuming super high-rise building. As a result, it was found that the difference caused by the period was larger than the difference due to the damping constant.

In addition, the comparison of the spatial distribution focusing on the site case; Shinjuku, Marunouchi, and Chiba, were investigated. On comparing the sites, we found that the area where the amplitude is dominant varies depended on the site. Shinjuku and Marunouchi sites, which are relatively close (less than 10 km), have almost the same spatial distribution, but there is a difference in the relationship between area 2 and 4. Further, at Chiba, which is far from these two sites, the amplitude is dominant in the area 5 where no dominance was observed at other sites.

Further, compared to areas 1 to 5 where the response value tends to be large and the SMGA location used in the previous study, it seems that the assumed source of the past could cover area 1 to 4; however, it can be seen that none of the cases were located in area 1 to 4. Further, it was found that the assumed source of the past could not cover area 5. As cases in which multiple areas can be considered in one case, Case P3 of HERP (2016) is assigned to areas 1 and 3, and Case P1 is assigned to areas 2 and 4. It seems that Case P3 could cover areas 1 to 5 the most.

6. References

- [1] Headquarters for Earthquake Research Promotion (2014): Long-term evaluation of earthquake along Sagami Trough (in Japanese).
- [2] Tokyo Metropolitan Government (2012): Damage assumption in Tokyo by an earthquake directly hitting Tokyo (in Japanese).
- [3] Central Disaster Management Council (2013): Working group for countermeasures against Tokyo Inland Earthquake, "About the damage estimation and countermeasures concerning the Tokyo Inland Earthquake (Final Report)," (in Japanese).
- [4] Headquarters for Earthquake Research Promotion (2016): Long period ground motion hazard map in 2016 (in Japanese).
- [5] Zama S (1993): Characteristics of long-period strong ground motion observed by JMA strong motion seismograph (Part 2: Tokyo). Report of Fire Research Institute of Japan, **76**, 1-12 (in Japanese).

- [6] Furumura, T., Hayakawa, T. (2007): Anomalous propagation of long-period ground motions recorded in Tokyo during the 23 October 2004 Mw 6.6 Niigata-ken Chuetsu, Japan, Earthquake. *Bulletin of the Seismological Society of America*, **97**(3), 863-880.
- [7] Ishii, T. (2008): A study on response duration time spectra of earthquake motions in Tokyo, 14th World Conference on Earthquake Engineering, Beijing, 02-0020.
- [8] Hirai, T., Fukuwa, N. (2013): Evaluation method of dynamic characteristics of sedimentary basin using 3-D finite difference method and reciprocity Theorem. *Journal of Structural Engineering*, **78**(694), 2083-2091 (in Japanese).
- [9] Petukhin, A., Miyakoshi, K., Tsurugi, M., Kawase, H., Kamae, K. (2016): Visualization of Green's function anomalies for megathrust source in Nankai Trough by reciprocity method. *Earth Planets and Space*, **68**(1), 4.
- [10] Graves, R. W. (1996): Simulating seismic wave propagation in 3D elastic media using staggered-grid finite differences. *Bulletin of the Seismological Society of America*, **86**(4), 1091-1106.
- [11] Koketsu, K., Miyake, H., Fujiwara, H., Hashimoto, T. (2008): Progress towards a Japan integrated velocity structure model and long-period ground motion hazard map, 14th World Conference on Earthquake Engineering, Beijing, S10-038
- [12] Terashima, Y., Fukuwa, N. (2019): Propagation characteristics of long-period ground motion in the Kanto Plain and variation due to source location. *Journal of Japan Association for Earthquake Engineering*, **19**(6), 16-35 (in Japanese).
- [13] Clayton, R., Engquist, B. (1977): Absorbing boundary conditions for acoustic and elastic wave equations. *Bulletin of the Seismological Society of America*, **67**(6), 1529-1540.
- [14] Cerjan, C., Kosloff, D., Kosloff, R., Reshef, M. (1985): A nonreflecting boundary condition for discrete acoustic and elastic wave equations. *Geophysics*, **50**(4), 705-708.
- [15] Terashima, Y., Fukuwa, N. (2019): Variation evaluation of long-period ground motions in the Kanto Plain due to the source location using the reciprocity theorem. *Japan Association for Earthquake Engineering Annual Meeting*, S21P-06 (in Japanese).
- [16] Koketsu, K., Kikuchi, M. (2000): Propagation of seismic ground motion in the Kanto Basin, Japan. *Science*, **288**, 1237-1239.
- [17] Miura, H., Midorikawa, S. (2001): Effects of 3-D deep underground structure on characteristics of rather long-period ground motion. Examination in and around Yokohama City. *Zishin*, **54**, 381-395 (in Japanese).
- [18] Boore, D. M., (2010): Orientation-independent, nongeometric-mean measures of seismic intensity from two horizontal components of motion. *Bulletin of the Seismological Society of America*, **100**, 1830-1835.